




Installation Instructions for the

# Adjustable Cable Lasso




**SKP-416K**  
Special Security Allen Wrench



**The Adjustable Lasso**  
(Shown Actual Size)

## Step 1:

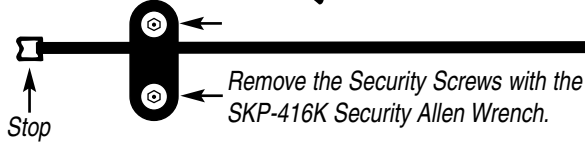


Remove the Security Screws with the SKP-416K Security Allen Wrench.

## Step 2:




Bottom Half of the Locking Mechanism



Place the Security Cable across the bottom half of the Locking Mechanism.

## Step 3:

Make a Lasso with the cable so it fits in the Locking Mechanism Slot.

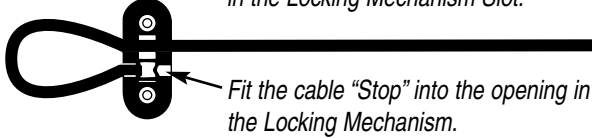


Fit the cable "Stop" into the opening in the Locking Mechanism.

## Step 4:




Top Half of the Locking Mechanism



Place the Top Half of the Locking Mechanism over the Bottom Half.


## Step 5:

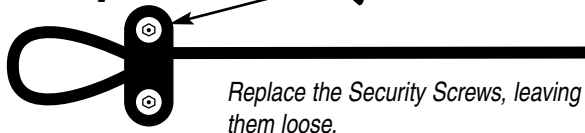


Replace the Security Screws, leaving them loose.

## Step 6:

Pull Cable to Tighten Lasso



When Lasso is adjusted, tighten the Security Screws to hold it in place.

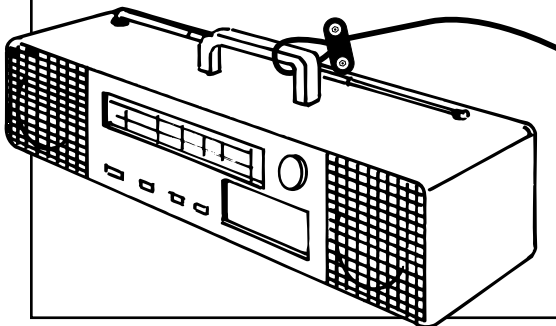

The **Adjustable Lasso** is the perfect way to cable any enclosed part of a product. The illustration at left demonstrates the Adjustable Lasso by "LASSOING" it around the handle of a boom box.

Ask your Customer Service Representative for information about Adjustable Lasso Cables.





# Se-Kure Controls,® Inc.

3714 Runge Street • Franklin Park, IL 60131 • 1-(800) 322-2435 • (847) 288-1111 • Fax: (847) 288-9999



# Installation Instructions for the Medium Duty Adj. Cable Lasso

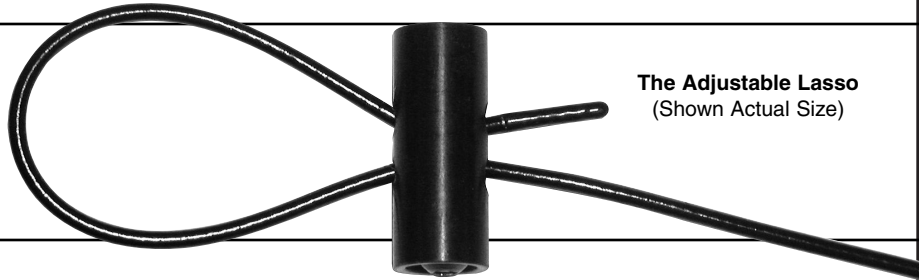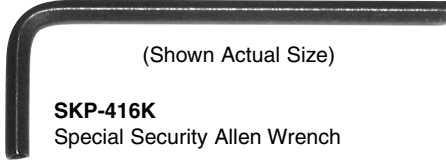

## Step 1:

Loosen the Locking Mechanism and pass the end of the cable through the barrel.



Loosen the screws with the SKP-416K Security Allen Wrench

## Step 2:

Pull out enough cable to "Lasso" the item to be protected.



## Step 3:

"Lasso" the item to be protected.




## Step 4:

Pass the end of the cable through the 2nd hole in the locking mechanism.



## Step 5:

Pull Lasso tight around object and tighten the Locking Mechanism with Allen Wrench.

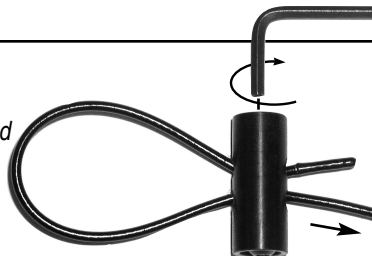

## Step 6:

Completed Adjustable Lasso.



The **Adjustable Lasso** is the perfect way to cable products with handles sufficiently narrower than their ends. The illustration at right demonstrates this by "**LASSOING**" the narrow handle of a Cordless Drill with a battery compartment on the end. Ask your Customer Service Representative for information about Adjustable Lasso Cables.




# Se-Kure Controls,® Inc.

3714 Runge Street • Franklin Park, IL 60131 • 1-(800) 322-2435 • (847) 288-1111 • Fax: (847) 288-9999



Installation Instructions for the


# Heavy Duty Adjustable Cable Lasso

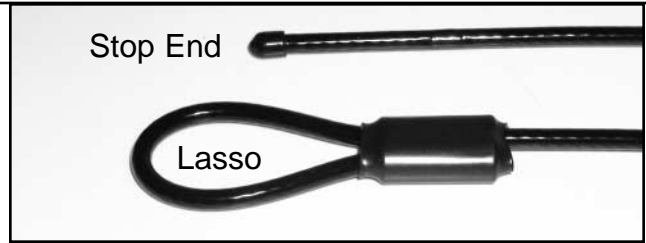


1. Pass the Stop End of the cable through an enclosure opening and the lasso to secure.



2. Pull the stop end through to "Lasso" and anchor the cable to the display.

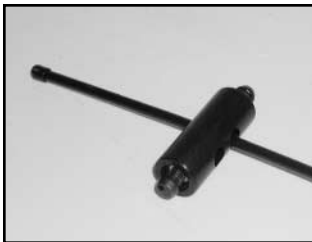

3. Insert the Lasso Body mechanism onto the Stop End of the cable.

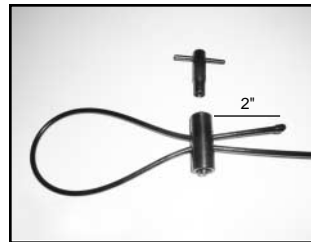

4. Form the Adj. Lasso by inserting the Stop End back through the other hole.

If you are securing an enclosed opening, you will need to lasso the item before you do step 4. Lasso the item, pull the lasso tight, and tighten the lasso with the SKP-500K TPS Security Screw Wrench. Always leave a couple inches of cable out the back side of the Adjustable Lasso.



*The Heavy Duty **Adjustable Lasso** is the perfect way to cable any enclosed part of a product. The illustration at left demonstrates the Adjustable Lasso by "**LASSOING**" it around the pedestal of a Big Screen Plasma TV. Ask your Customer Service Representative for information about Heavy Duty **Adjustable Lasso** Cables.*



## Se-Kure Controls,® Inc.

3714 Runge Street • Franklin Park, IL 60131 • 1-(800) 322-2435 • (847) 288-1111 • Fax: (847) 288-9999